

# 1-10V LED Dimming Driver

0-72W...144W 6A 12-24Vdc

- Dimming interface: 0 -10V ,1 -10V ,10V PWM or push button
- PWM digital dimming, no alter LED color rendering index.
- Dimming range: 0~100%, LED start at 0.1% possible.
- Max. current output: 6A.
- Full protective plastic housing.
- Suitable for indoor environments.




### Main Characteristics


Dimming Interface: 0 -10V ,1 -10V ,10V PWM or push button  
 Input Voltage: 12-24Vdc  
 Output Voltage: 12-24Vdc  
 Output: 6A×1CH  
 Max. Output Power: 0-72W...144W  
 Dimming Range: 0~100%, LED start at 0.1% possible

Working Temperature: -30℃~55℃  
 Product Size: L135×W30×H20(mm)  
 Package Size: L140×W34×H23(mm)  
 Weight(G.W.): 65g


### Dimensions

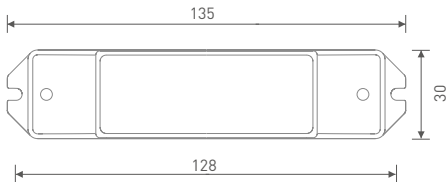



### System Connection Diagram:

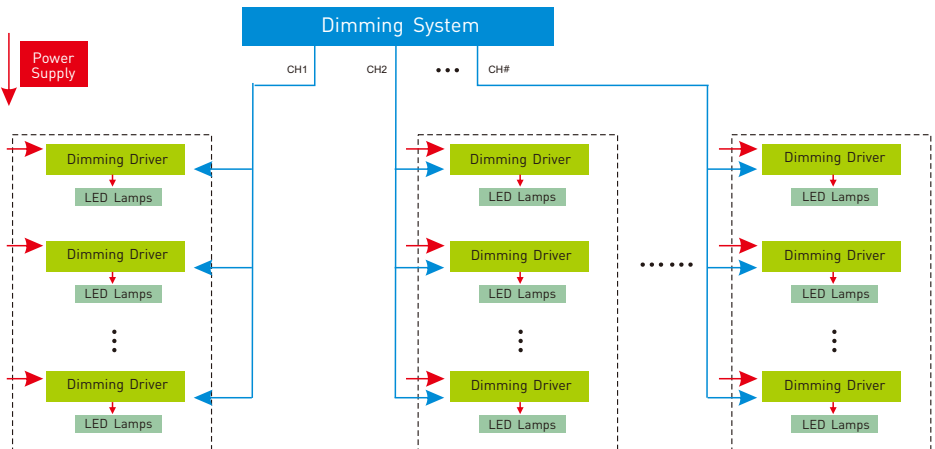

The default design doesn't support the 1-10V and push dimming that work together, if you want them to work together, please mark down when placing a order.

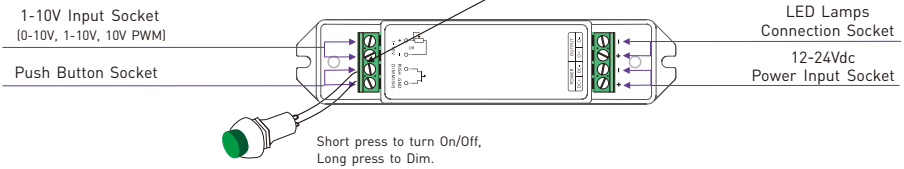

12V lamp connected, loads 0~72W(12V).

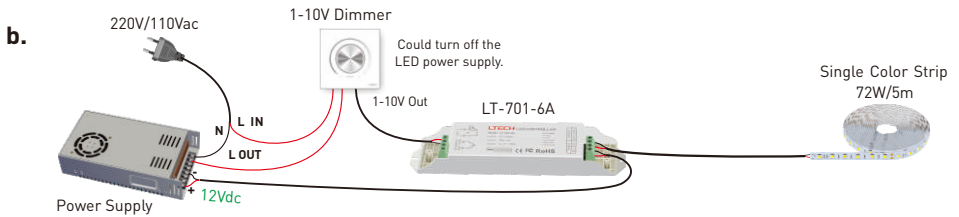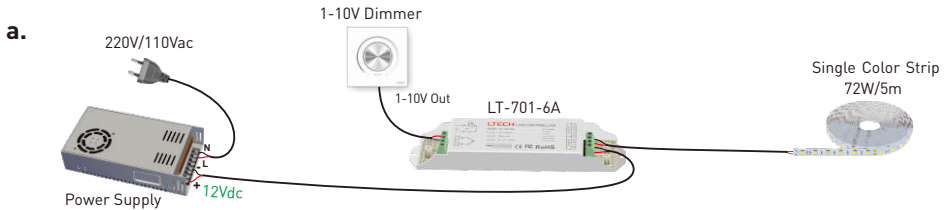

24V lamp connected, loads 0~144W(24V).

